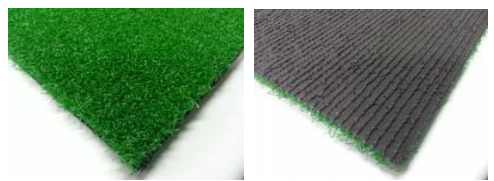


# KONYGREEN® CN1200

TECHNICAL SPECIFICATIONS				
PROPERTIES	RESULT	TOLERANCE	UNIT	NOTE
<b>Product properties</b>				
PILE HEIGHT	12	± 10%	mm	
PILE WEIGHT	990	± 10%	g/m <sup>2</sup>	
TOTAL WEIGHT	1,500	± 10%	g/m <sup>2</sup>	
GAUGE	5/32	-	inch/stitches	* 5/16GG
PILE MATERIAL	Nylon	-	-	
YARN TYPE	Crimp 4,000	-	-	
TUFTING NO.	69,000	± 10%	-	
BACK FABRIC	P.P WOVEN	-	-	
BACK COATING	SBR	-	-	
U.V.RAYS	TREATED	-	-	
<b>Roll properties</b>				
Length	On demand	Always delivered with 1% extra		
Width	4.0	-0 + 0.05	m	
Packaging	Rolls are packed individually in green film with KONYGREEN print. Rolls are not on a pallet			

<b>MAIN USAGE</b>	Landscaping
<b>PRODUCTION PLANTS</b>	Kumi-City (Republic of KOREA)
	The product properties are typical values provided by our Internal control system. * Gauge could change, but pile weight and tufting No. are same.

STRENGTHS	
<ul style="list-style-type: none"> <li>▷ Environment-friendly (Heavy metal-free)</li> <li>▷ High durability (Light Fastness, Abrasion Stability)</li> <li>▷ Good water permeability.</li> </ul>	

1-23, KOLON TOWER 8F, BYULYANG-DONG, GWACHEON-CITY, GYUNGGI-DO, KOREA  
 TEL:(822) 3677-5918/5922 FAX:(822) 3677-5903 E-mail:andykoo@kolon.com/martinpark@kolon.com